


1/2 in. HOLES FOR
3/8 in. FASTENERS

1/4 x 2 in FLAT STOCK
(4 SIDES)

ALUMINUM ROUND BAR

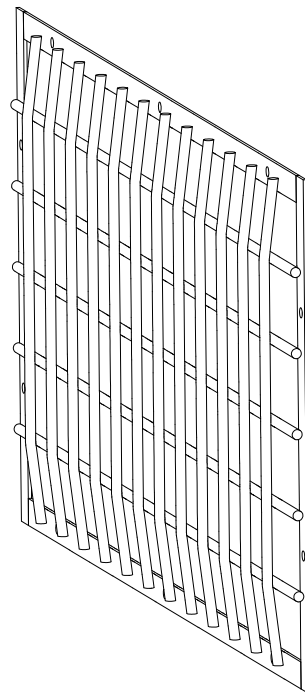

ISOMETRIC VIEW

NOTES:

1. ALL MATERIALS TO BE ALUMINUM 6061-T6 ALLOY.
2. WELD ALL INTERSECTIONS.
3. FASTEN TO CONCRETE STRUCTURE WITH 3/8 in. x 3 in. STAINLESS STEEL CONCRETE WEDGE ANCHORS AT 18 in. MAX. SPACING. MINIMUM OF (4).
4. THICKNESS OF RACK = 2 x BAR DIAMETER + 1/4 in.
5. OVERALL RACK WIDTH = (W) + 4 INCHES.
6. OVERALL RACK HEIGHT = (H) + 4 INCHES.
7. OPTIONAL - 10g STAINLESS STEEL WIRE MESH WITH 1 in. GRID TO COVER RACK.

TRASH RACK INFORMATION	
RACK WIDTH I.D. (W)	
RACK HEIGHT I.D. (H)	
BAR DIAMETER	
BAR CENTERLINE SPACING	
STRUCTURE OPENING W	
STRUCTURE OPENING H	
FASTENERS (QTY)	
WIRE MESH?	
NOTES:	

This CAD file and drawing is the property of Effluent Design & Fabrication, LLC. It is intended for the named recipient. Unauthorized reproduction, disclosure, or distribution is strictly prohibited.



Effluent
Design & Fabrication, LLC
www.effluentdesignfab.com

6 William Martin Way
Flemington, NJ 08822

Phone: 908.458.9220
FAX: 908.458.9930

PROJECT:
ALUMINUM FLAT SERIES AFR RACK

FILE #:

DATE:

SCALE:

DRAWN BY: